

SLIDING DOORS SYSTEMS FOR WARDROBE DOORS, ROOM DIVIDERS, ROOM PARTITIONS AND WALK-IN WARDROBES


Draks uses a bottom-weighted track system, which rebates a spring-loaded wheel to the underside of the door, offering great practical advantages. It means the wider the door, the greater the stability (the converse of most top weighted systems). The top track acts as a guide only, thus allowing installation in places with problematic ceiling construction. The bottom track may be surface mounted and, being only 6mm does not cause an obstruction. It may also be recessed into carpet, laminate, hardwood floors or even marble and tiling. The top and bottom tracks are either single, double or triple.



↑ Single rebated track set directly into tiling.



↑ Triple rebated track set into timber.

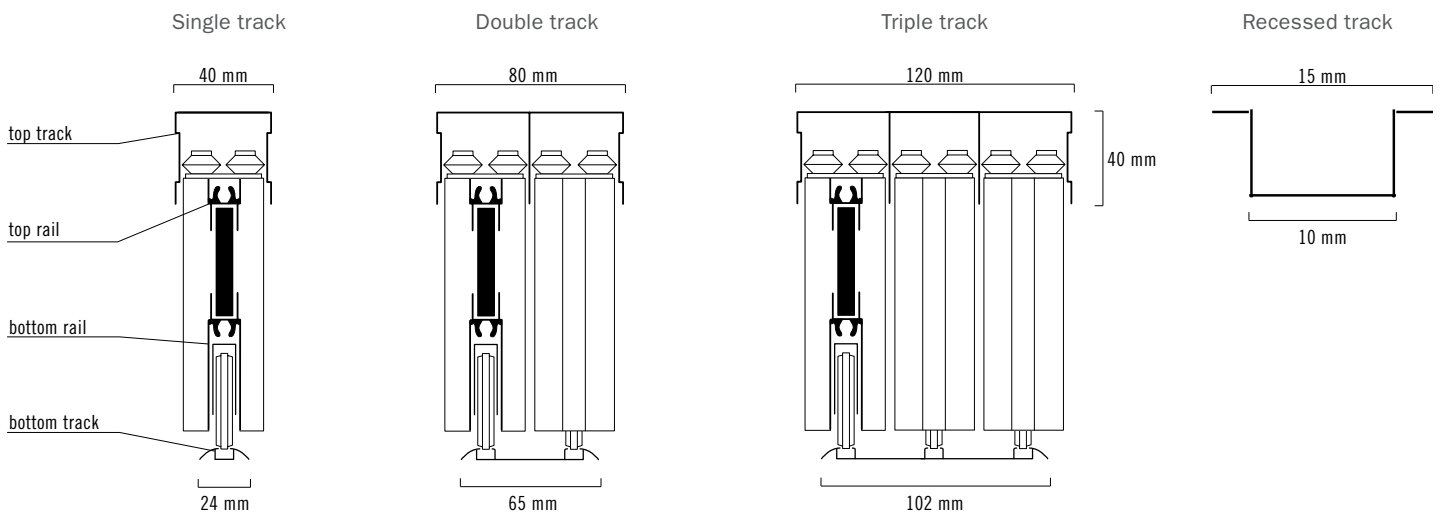

Track details	Depth	Width
Top track single	40	40
Top track double	40	80
Top track triple	40	120
Bottom track single	6	24
Bottom track double	6	65
Bottom track triple	6	102

Frame	Max. door width	Min. door width	Max. door height
Canto screens	1200	500	2600
Aluminium **	1200	500	2600

All dimensions are in millimetres

** For coloured glass infills the maximum width is 1070mm unless midrails are used.

** Aluminium doors may only be made over 2440mm height when midrails are used.

- Larger sizes may be available - please ask for details from our technical department.
- All solid wood framed doors are supplied as standard with brushed pile strip on both sides.
- Canto screens are not recommended to be hinged as doors.

DRAKS
INTERIOR DOOR SYSTEMS

T: 01869 232 989
www.draksonline.co.uk